ProREZ™
Performance Resins and Coatings

Step Diagram

ProCryl Flex NQ- MMA Slurry SL Broadcast - 40 or 25 mesh aggregate

ProCryl Primer, Clear - (16 mils)

ProCryl FX Binder, Pigmented Slurry SL, Natural Quartz Broadcast -1/8"-3/16" (40 mesh)

ProCryl UVR Top Coat, Pigmented - (16-18 mils)

Optional: 2nd ProCryl UVR Top Coat, Pigmented - (10-16 mils)

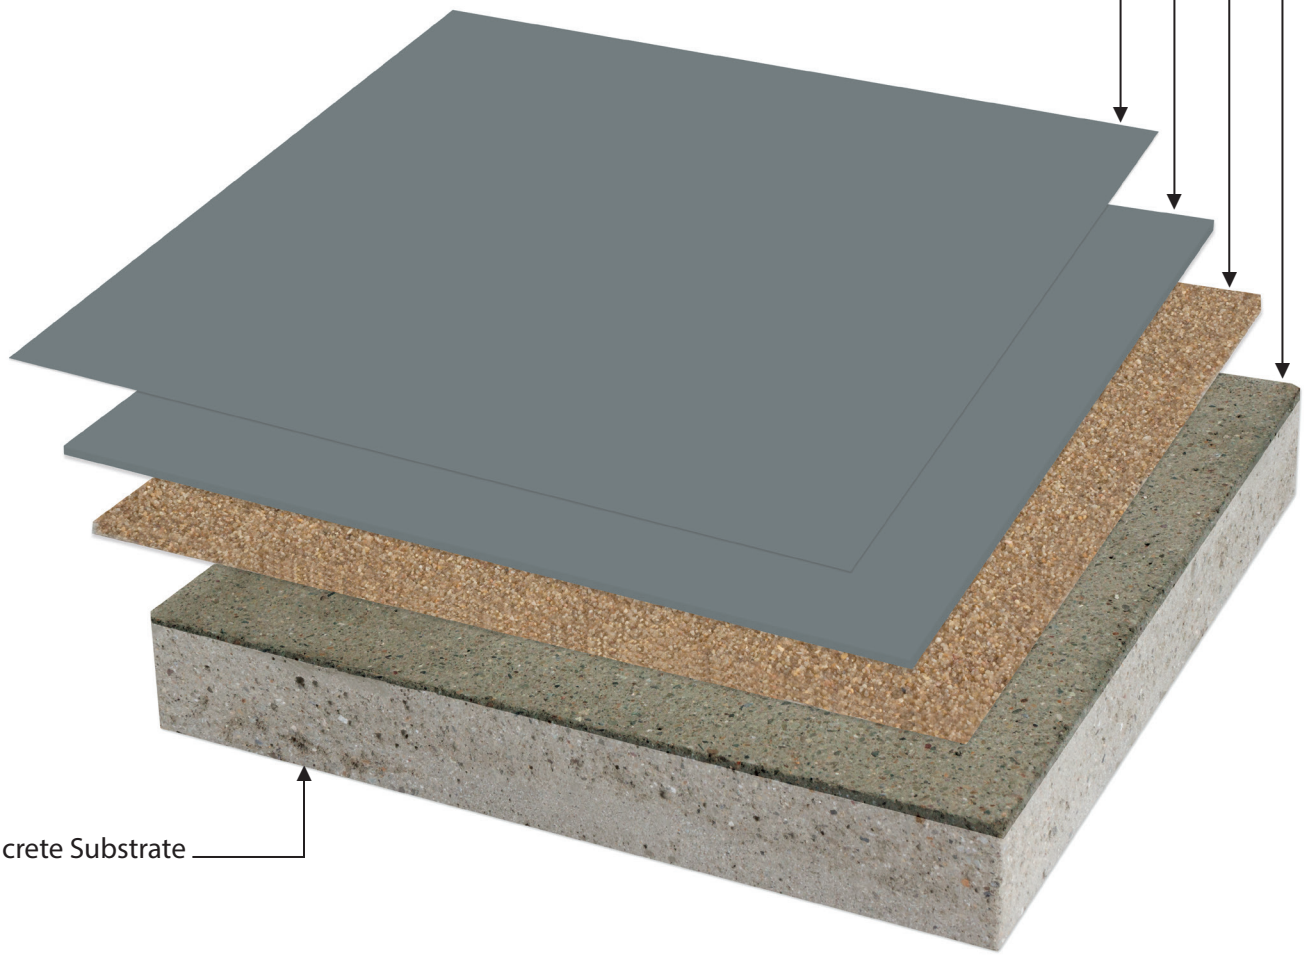

Concrete Substrate

CONTRACTOR TESTED + APPROVED

*Note: Approximate thickness- variable with application method, size of aggregate, & substrate conditions.

ProREZ™
Performance Resins and Coatings

Step Diagram

ProCryl Flex CQ - MMA Slurry SL Broadcast- 40 or 25 mesh colored quartz- 3/16"-1/4"

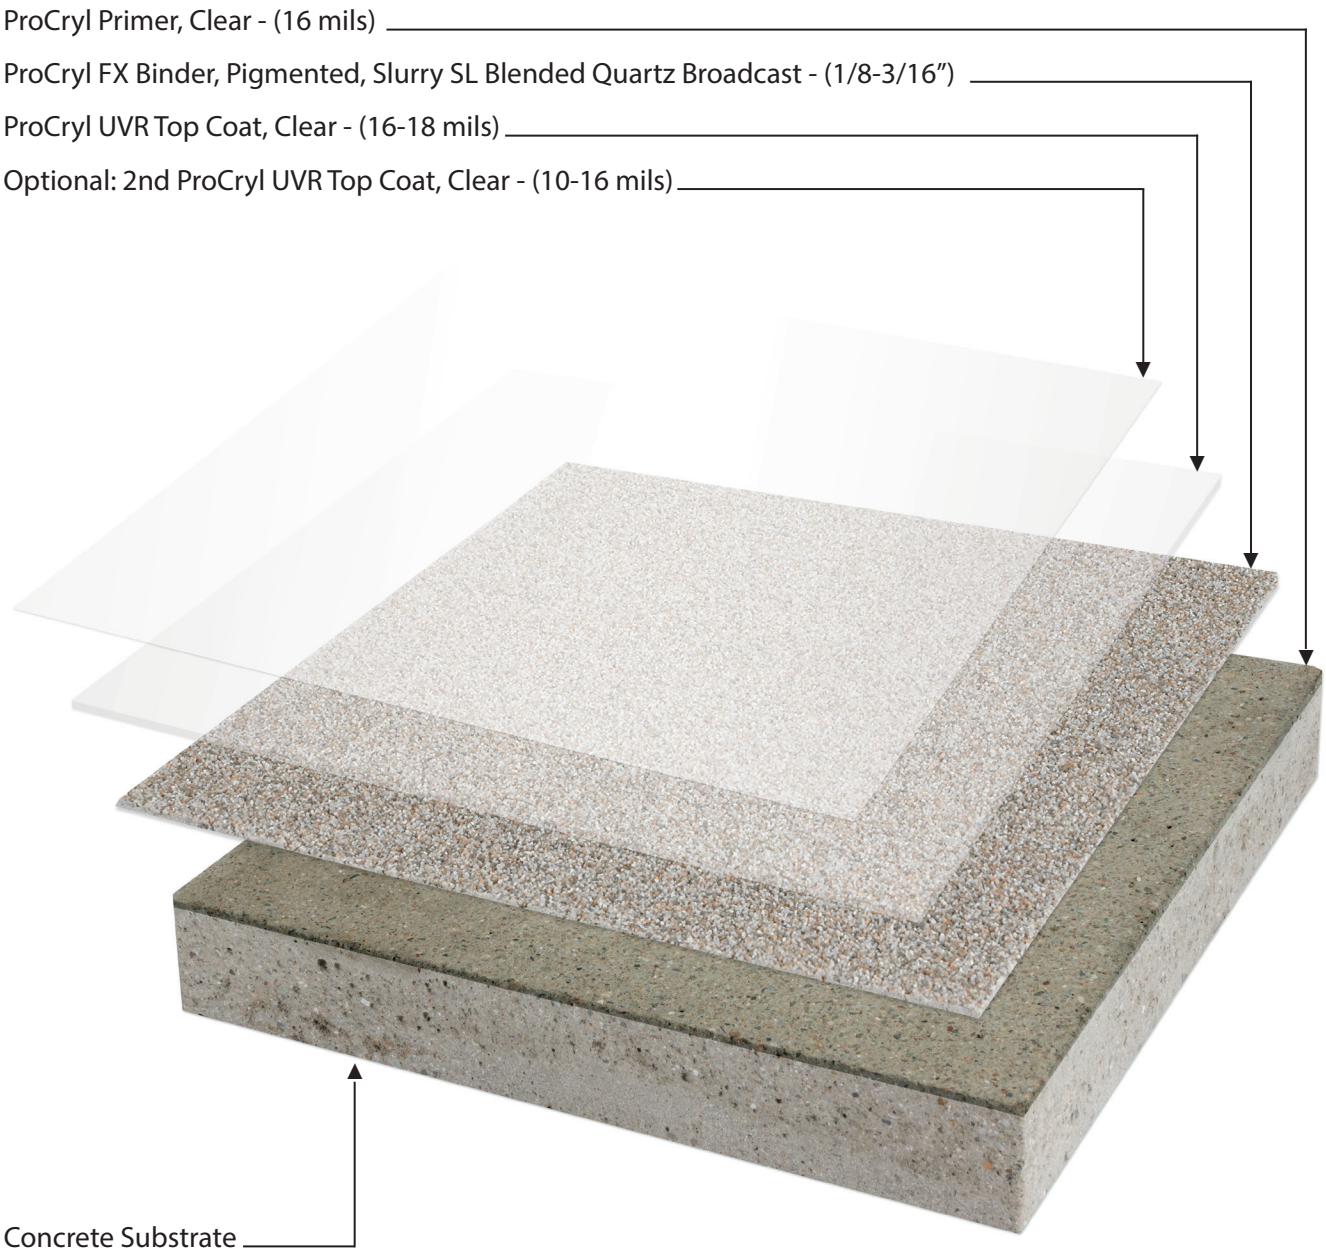

CONTRACTOR TESTED + APPROVED

*Note: Approximate thickness- variable with application method, size of aggregate, & substrate conditions.