

ProKrete SLF Hybrid System - Single or Double Broadcast- 1/4" macro or 1/16" micro blended flake- 1/8"-3/16"


No Primer Necessary

ProKrete SL Slurry Pigmented Base Coat1- Blended Polymer Flake Broadcast - (1/16-3/16")

Optional: ProPoxy or ProSpartic Clear Base Coat2- Blended Polymer Flake Broadcast - (1/32")

ProPoxy or ProSpartic Clear Grout/Top Coat - (12-16 mils)

ProThane S, F or HH Clear Finish Coat - (3-5 mils)

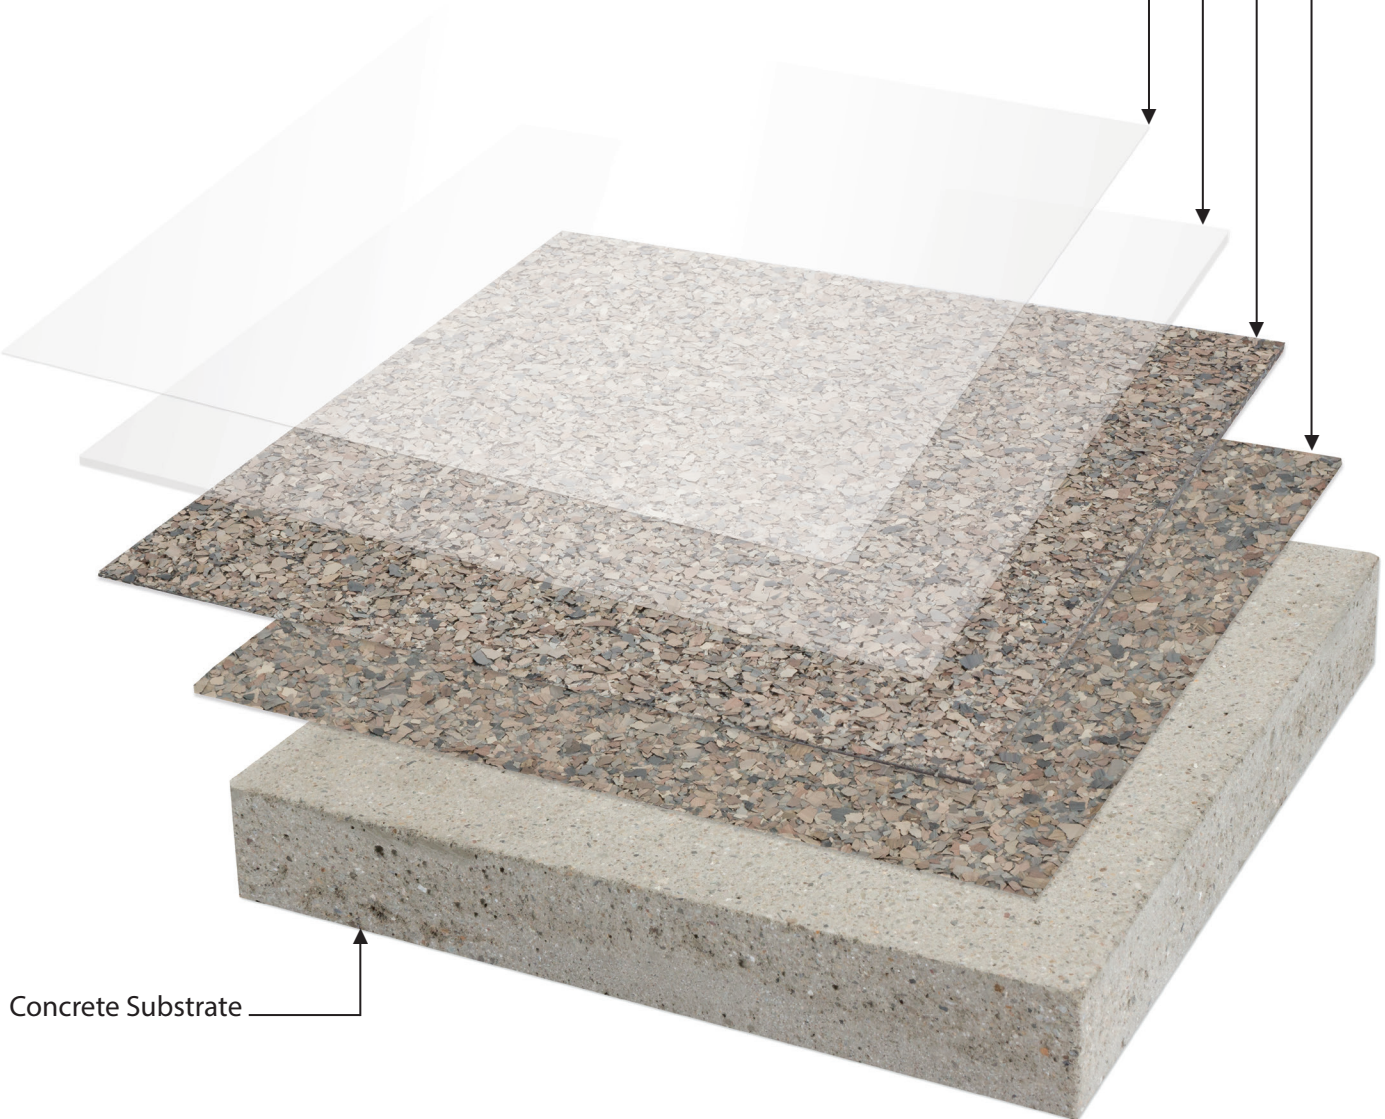

Concrete Substrate

*Note: Approximate thickness- variable with application method, size of polymer flake, & substrate conditions.



ProKrete SLQ Hybrid System - Single or Double Broadcast- 40 or 25 mesh colored quartz- 1/8"-3/16"


No Primer Necessary

ProKrete SL Slurry Pigmented Base Coat1- Blended Quartz Broadcast - (1/16-3/16")

Optional: ProProxy or ProSpartic Clear Base Coat2- Blended Quartz Broadcast - (1/16")

ProProxy or ProSpartic Clear Grout/Top Coat - (16-18 mils)

ProThane S, F or HH Clear Finish Coat - (3-5 mils)

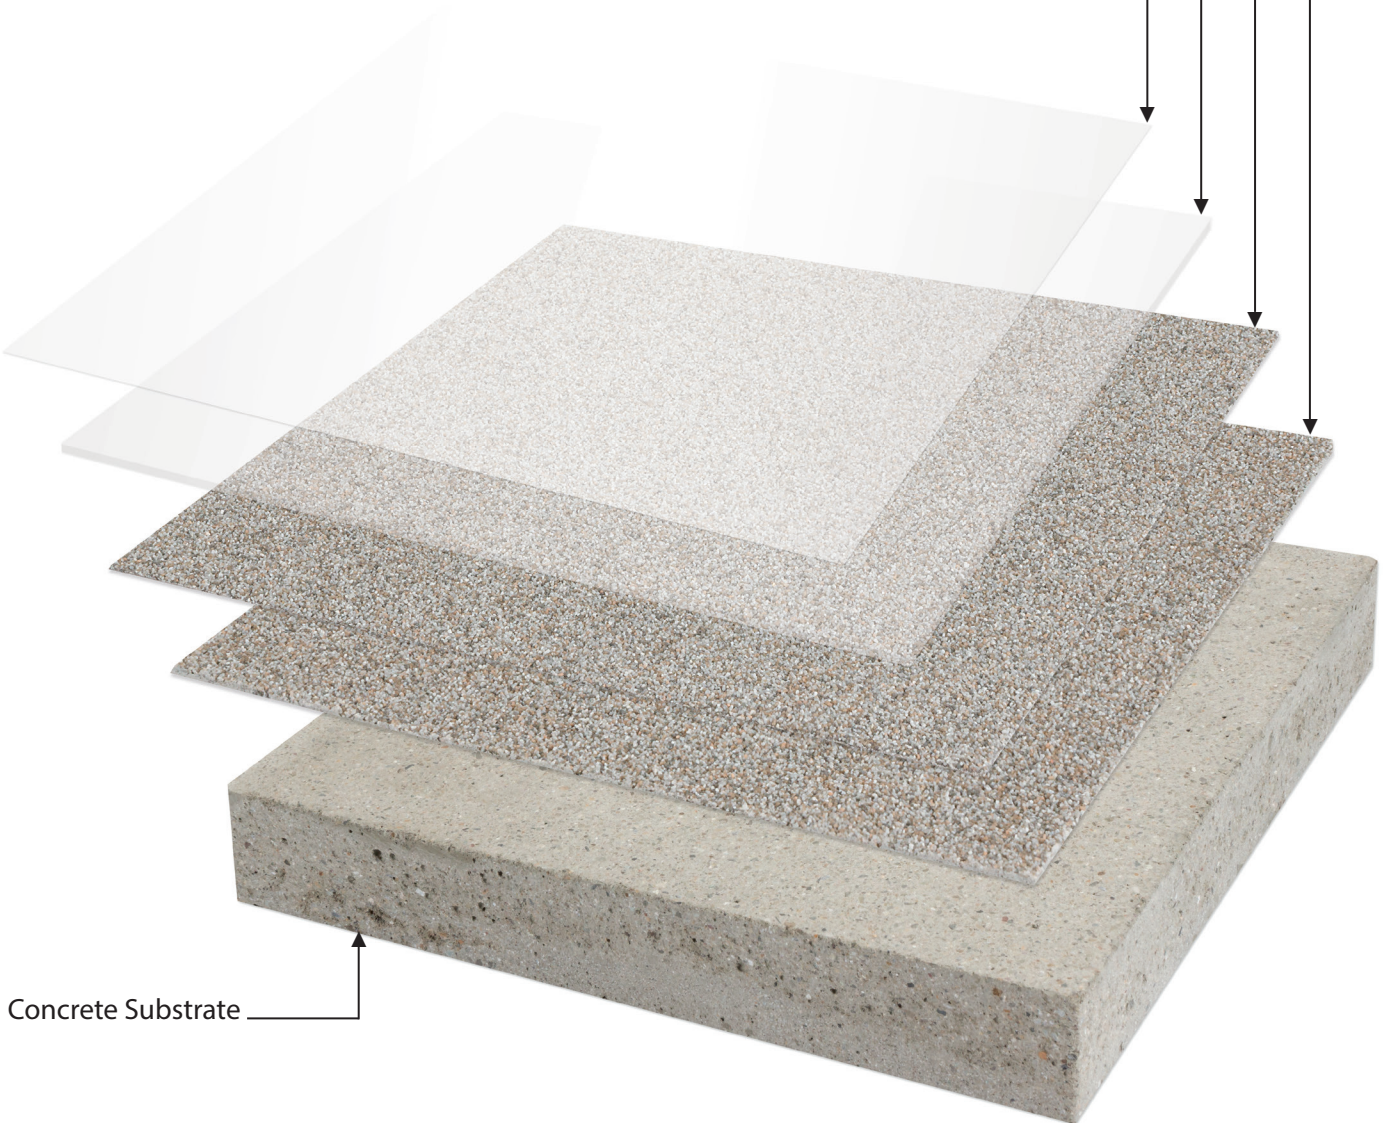

Concrete Substrate

*Note: Approximate thickness- variable with application method, size of aggregate, & substrate conditions.

