


**ProClad ST System-** (Standard Trowel-Based Epoxy Mortar System)- 1/4"-1"

ProPoxy S, F, or MB Primer (Clear)- 8-16 mils

ProPoxy S or F Epoxy Mortar Overlay (Clear or Pigmented) - 1/4"-1"

ProPoxy Cove Resin S or F Seal/Grout Coat (Pigmented)- 12-16mils

Optional Topcoat: ProThane S or F 3-5 mils, or ProSpartic S or F (Clear or Pigmented)- 8-12 mils

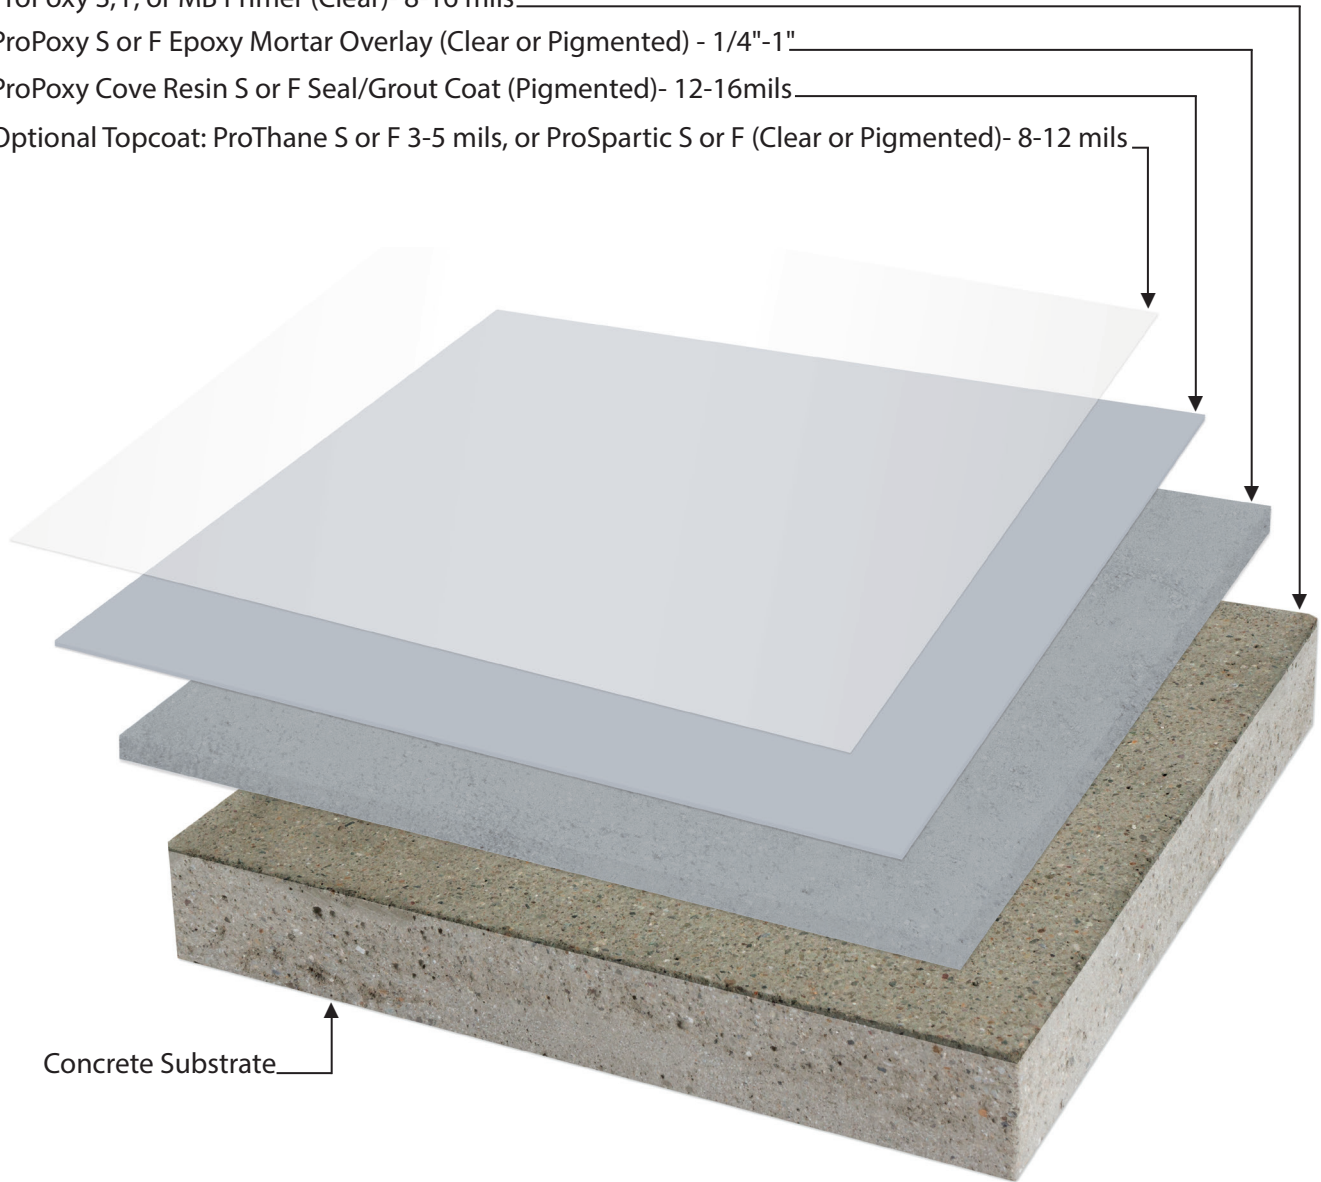

Concrete Substrate

\*Note: Approximate thickness- variable with application method & substrate conditions.

